



**Lasts twice as long, period.\***



# MR 5-30 Fuel Meter

\* This meter has two times the life of the industry standard for mechanical fuel meters.



# MR 5-30 Fuel Meter

UL Listed Meter to US and Canadian Standards


Choose the MR 5-30 when you need to meter petroleum fuels. This aluminum meter is perfect for use with gasoline (alcohol blends up to E15), diesel fuel and kerosene. Designed for high volume pumps.

## SPECIFICATIONS

Unit of Measure:	U.S. Gallon	Litre	
Flow Range:	5 to 30 GPM	19 to 114 LPM	
Typical Accuracy:	± 2%	± 2%	<b>Note:</b> Accuracy is factory calibrated for diesel fuel. Field Calibration is available on all models.
Type:	Nutating Disc	Nutating Disc	
Housing Material:	Aluminum	Aluminum	
Maximum Working Pressure:	50 PSIG	3.4 bar	
Inlet/Outlet Fitting Size:	3/4", 1" or 1-1/2"	3/4", 1" or 1-1/2"	
Threads:	NPT	NPT or BSPP	UL LISTING ONLY APPLIES TO MODELS WITH NPT THREADS
Maximum Batch Total:	999.9	9,999	
Maximum Cumulative Total:	999,999.9	9,999,999	



## FEATURES

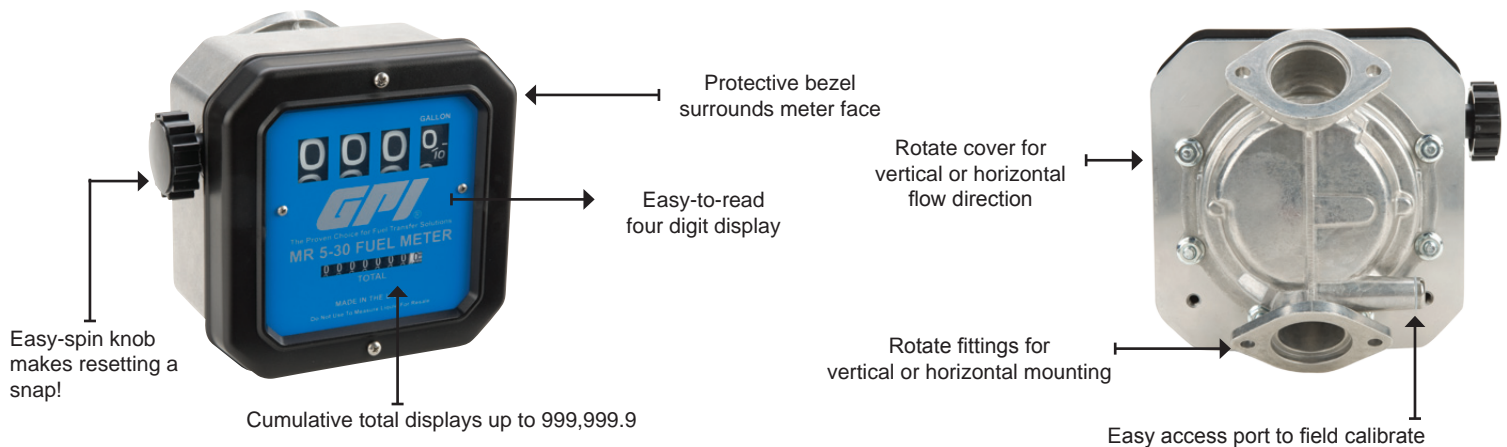

## MODELS INCLUDE:

126300-01 - Calibrated in gallons with 3/4 inch NPT fittings	126300-02 - Calibrated in litres with 3/4 inch NPT fittings	126300-07 - Calibrated in litres with 3/4" BSPP fittings
126300-03 - Calibrated in gallons with 1 inch NPT fittings	126300-04 - Calibrated in litres with 1 inch NPT fittings	126300-08 - Calibrated in litres with 1" BSPP fittings
126300-05 - Calibrated in gallons with 1-1/2 inch NPT fittings	126300-06 - Calibrated in litres with 1-1/2 inch NPT fittings	126300-09 - Calibrated in litres with 1-1/2" BSPP fittings

For more information visit [www.gpipumps.net](http://www.gpipumps.net), or contact us at 800-835-0113 or 316-686-7361.